




## PEZO



Pezo's IP66 LED Linear family offers continuous runs of dot-free illumination or best performer as an individual luminaire, suitable for surface, wall or suspension, gasketed sealed channel makes it suitable for outdoor harsh environments, high-impact acrylic anti yellowing diffuser provides smooth uniform illumination, supplied with Integral driver.

Available with any length for continuous runs.

**Material-** Extruded aluminium channel with high-impact acrylic diffuser.

**Finish-** Silver anodized paint finish


**Efficacy-** 82lm/W

**Input voltage-** 240V 50/60Hz

**Dimming-** 1-10V, DALI or DSI.

**Life:** 50,000 Hours L70

**Warranty:** 3 years

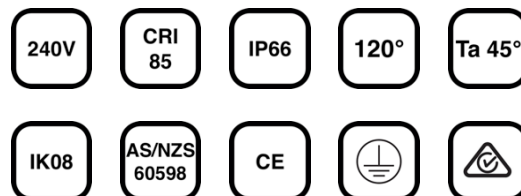



Model number	Wattage	Beam Angle	CCT	Finish	Controls
PE-15W-120-5K-AL-S	15W/M 20W/M 25W/M	120°	3000K 4000K 5000K	AL BK WH	S: Standard D: DALI A: 1-10V Dimming

Surface Mounting Bracket

Sliding Mounting Plate

Fixture

