



VITA

Vita's LED panels are backlit and provides homogeneous illumination, equipped with low glare micro-prism UGR<19 diffuser ideal for office lighting, designed to reduce glare and improve light distribution through precision formed lens optics, high efficacy 150lm/W available upon request, all sides and corners are turned in and hemmed, removing sharp edges for safe handling and installation, available in different wattages and sizes to suit various applications, high CRI and smart controls for human centric lighting available as an option.

Material- Extruded aluminium frame, anti UV PMMA micro prism diffuser.


Finish- white powder coated paint

Efficacy- 115-120lm/W

Input voltage- 100-240V 50/60Hz


Dimming- 1-10V, DALI or DSI.

Life: 58,000 Hours L80/B10

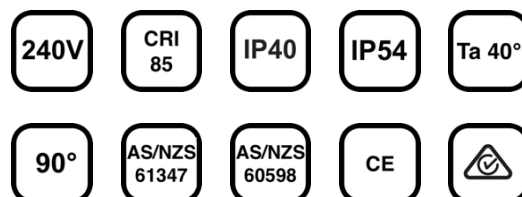



Model number	Size mm	Wattage	Mount	IP	CCT	Controls
VI-3-36W-R-40-4K-S	1: 295x295x35	12W 16W	R: Recessed	IP40	3000K	S: Standard
	2: 295x595x35	16W 20W	S: Surface	IP44	4000K	D: DALI
	3: 595x595x35	36W 40W	P: Pendant	IP54	5000K	A: 1-10V
	4: 295x1195x35	36W 40W			HCL	E: Emg
	5: 595x1195x35	50W 60W			Tri color	M:Sensor

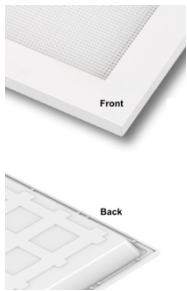

Suspension Mount



Spring clip



Surface Mount frame

