



## SCURA II

Scura II is a surface mount robust LED weatherproof luminaire, made from materials selected to withstand aggressive atmospheres laden with salts, acid and mineral oils, frosted opal diffuser for uniform lighting, corrosion and impact resistant, sealed to IP67 and IK08 rated, flammability (UL94) V2 glow wire test (EN 60595-2-11) 850°C, ideal to use in abattoirs, factories, process areas, transport terminals, covered parking areas, industrial facilities, service areas, and multipurpose halls, modular gear tray can be replaceable for maintenance or upgradable for future needs, supplied with weatherproof cable glands.

**Material-** Highly robust self-extinguishing GRP body, anti-UV Opal PMMA diffuser with stainless steel clips.


**Finish-** Grey finish

**Efficacy-** 125-140lm/W

**Input voltage-** 240V 50/60Hz

**Dimming-** 1-10V, DALI, DSI, motion sensor.

**Life:** 50,000 Hours L80

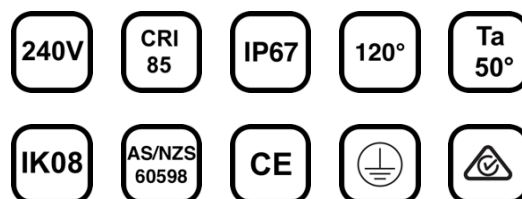



Model number: SCII-45W-5K-S			
Wattage	15W   24W	20W   45W   55W	30W   50W   65W
Length	600mm	1200mm	1500mm
CCT	2700K   3000K   4000K   5000K   5700K   6000K		
Controls	S: Standard   D: Dali   A: 1-10V   M: Motion Sensor   E: Emergency		

